
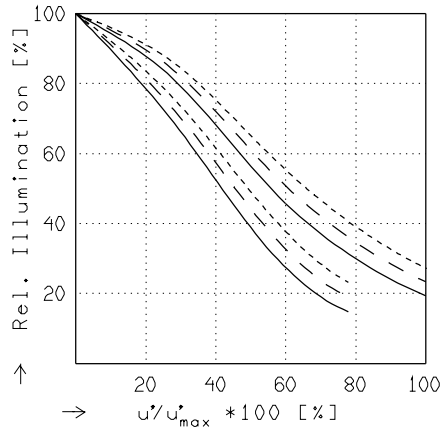


SUPER-ANGULON XL 5.6/58

$f' = 58.1 \text{ mm}$ $\beta_p = 1.025$
 $s_F = -37.6 \text{ mm}$ $s_{EP} = 19.1 \text{ mm}$
 $s_{F'} = 38.5 \text{ mm}$ $s_{AP} = -21.0 \text{ mm}$
 $HH' = 24.5 \text{ mm}$ $\Sigma d = 64.6 \text{ mm}$

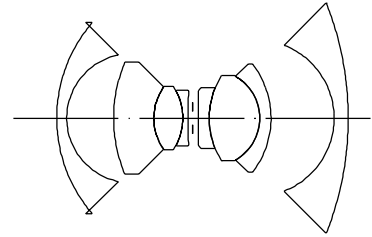


RELATIVE ILLUMINATION

The relative illumination is shown for the given focal distances or magnifications.

$f / 5.6$ $f / 22.0$


—	$\beta' = 0.0000$	$u'_{max} = 83.3$	$00' = \infty$
- -	$\beta' = -0.1000$	$u'_{max} = 83.2$	$00' = 728.$
- · -	$\beta' = -0.2000$	$u'_{max} = 83.2$	$00' = 443.$

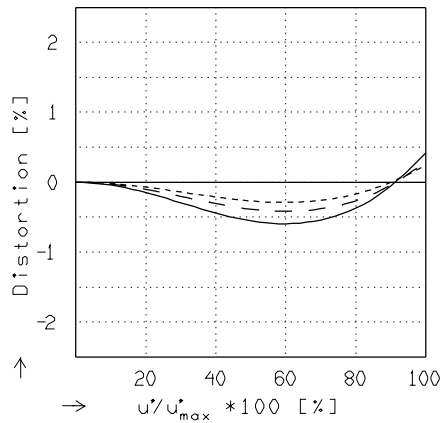

DISTORTION

Distortion is shown for the given focal distances or magnifications. Positive values indicate pincushion distortion and negative values barrel distortion.

—	$\beta' = 0.0000$	$u'_{max} = 83.2$	$00' = \infty$
- -	$\beta' = -0.1000$	$u'_{max} = 83.2$	$00' = 728.$
- · -	$\beta' = -0.2000$	$u'_{max} = 83.2$	$00' = 443.$

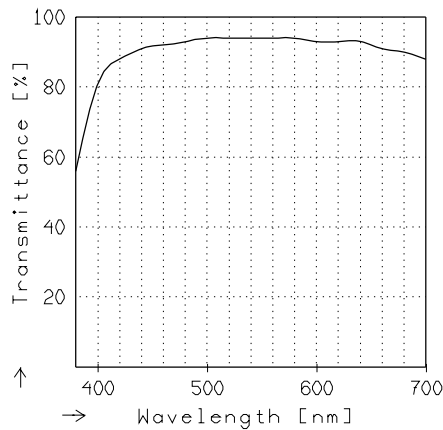

TRANSMITTANCE

Relative spectral transmittance is shown with reference to wavelength.







Jos. Schneider Optische Werke GmbH
 Ringstrasse 132 55543 Bad Kreuznach Germany

SUPER-ANGULON XL 5.6/58

MODULATION with reference to the relative image height

Wavelength λ	[nm]	546	644	588	480	436	405
Spectral weighting	[%]	24.6	18.6	22.1	12.4	15.2	7.1
Spatial frequency R	[1/mm]	5	10	20			
Image- \emptyset f / 5.6	[mm]	129.3					
Image- \emptyset f / 22.0	[mm]	166.0					

radial —
 tangential - -

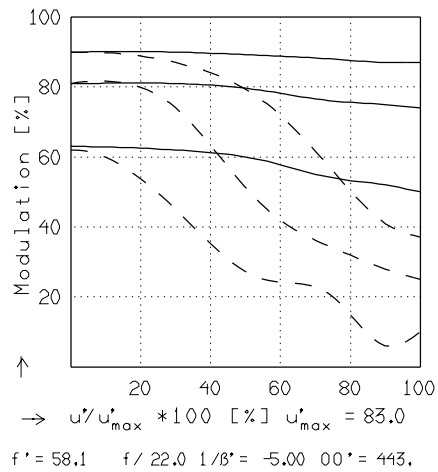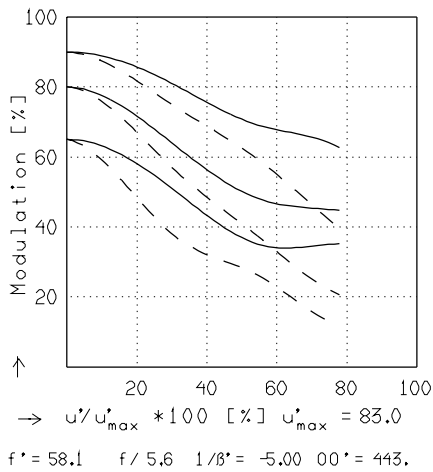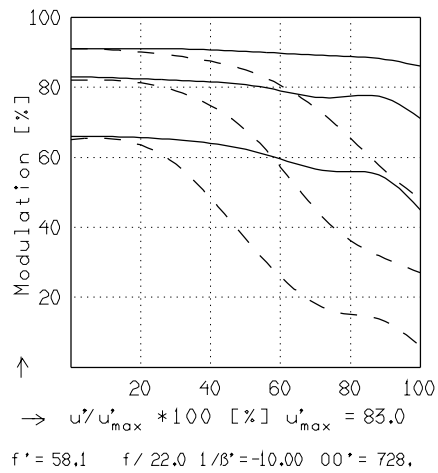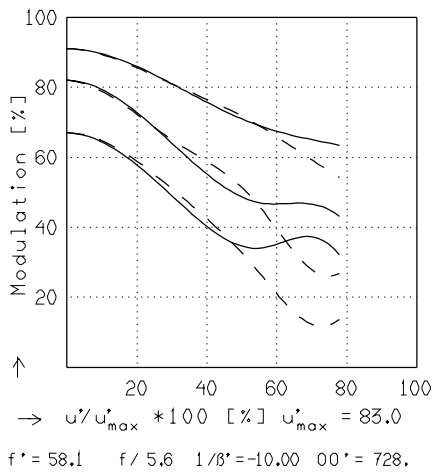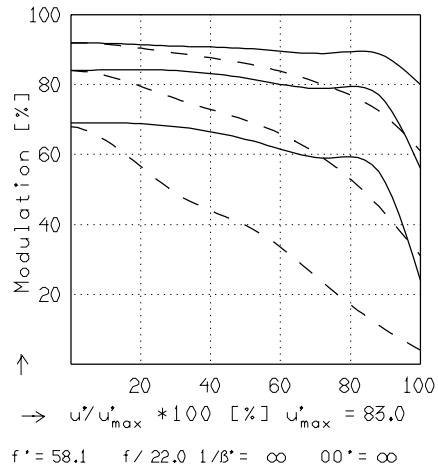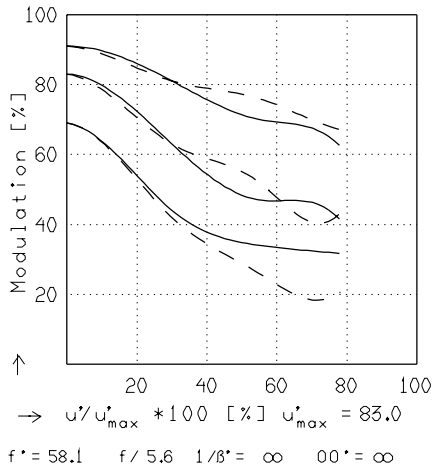

Focusing : MTF_{max} at $f / 5.6$, $R = 20$ 1/mm , $u'/u'_{max} = 0$